

Sunmaster

Solar Systems

Rinnai

Relax. It's a Rinnai.



Rinnai draws from over 40 years experience in designing and manufacturing Hot Water Systems. The Rinnai Sunmaster range of Solar Hot Water Systems have been designed specifically to make the most out of harvesting free energy from the sun with an affordable outlay.

Close Coupled Systems


A close coupled solar system is where the storage tank and the Solar Collectors are coupled together and the installation is on the roof.

Rinnai Sunmaster close coupled solar systems use the thermo-syphoning principle (i.e. hot water rises because it is less dense) to circulate the water through the Collectors and then to the storage cylinder without the need to consume energy.

Supplementary heat is available from an electric element or a Rinnai gas booster if insufficient heat is available from the sun (such as during cloudy or rainy weather or during winter months).

Features and Benefits

- > Low heat loss due to greater insulation
- > Gas or electric booster options
- > Carbon steel tank with a vitreous enamel glass lining to protect against corrosion
- > Thermal Arrestor valve reduces stress on the tank by preventing excessive hot water temperature stored in the tank
- > Technically very efficient, economical to install and low maintenance
- > No electricity is required to operate pumps to recirculate the water through the collectors
- > Saves space on your land as there is no ground mounted tank
- > High performance resulting in high Small Scale Certificates awarded

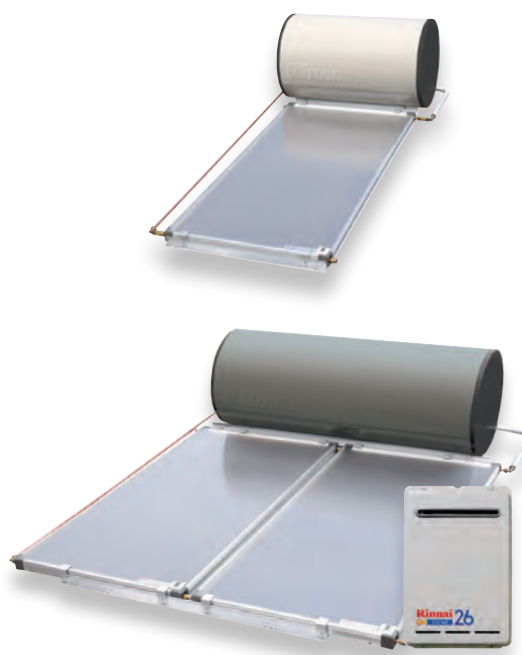

Description	Order code	Size	Booster	Collectors	Boost capacity	System Selection No of people	
						Average usage	High usage
Close coupled electric	System 9	200	2.4 kW	1	100	3	2
	System 10	330	3.6 kW	2	180	6	4
Close Coupled gas	System 11	200	S20	1	20L/min	3	2
	System 12	330	S26	2	26L/min	6	4

Split Systems

A split system is where the storage tank and the Solar Collectors are split and installed separately. A solar control unit ensures the water circulates between the Solar Collectors and the storage tank. This transfers heat from the Collectors to the water in the tank if enough heat is available from the sun. An electric element or a Rinnai gas booster mounted either on a wall or on the side of the tank will boost the temperature of the solar heated water if necessary.

Features and Benefits

- > Streamlined appearance – minimal impact on the aesthetics of your roofline with only the collectors visible
- > Cost effective glass lined (Vitreous Enamel) cylinders
- > Tall slimline tank design with a smaller footprint for minimal aesthetic impact
- > Continuous Flow Gas Booster – same technology as the Rinnai INFINITY
- > Electric boosted packages featuring optimized element position
- > High efficiency flat plate collectors
- > Evacuated tube systems available for frost protection down to -12°C. (refer to separate brochure).
- > Easy installation or conversion on roofs
- > Ground mounted tank can be installed internally or externally
- > Gas or electric booster ensures that you will never run out of hot water
- > Collectors and the tank do not need to be installed at the same time
- > Split systems do not require reinforcement of the roof structure, as the weight associated with water storage is at ground level
- > High performance resulting in high Small Scale Certificates awarded



						System Selection No of people	
Description	Order code	Size	Booster	Collectors	Boost capacity	Average usage	High usage
Split system gas	System 1	175	S20	1	20L/min ⁽²⁾	5	3
	System 1-XL	175	S20	(Enduro XL) ⁽¹⁾	20L/min ⁽²⁾	5	3
	System 2	175	S26	1	26L/min ⁽²⁾	5	3
	System 2-XL	175	S26	(Enduro XL) ⁽¹⁾	26L/min ⁽²⁾	5	3
	System 3	215	S20	2	20L/min ⁽²⁾	6	4
	System 4	215	S26	2	26L/min ⁽²⁾	6	4
	System 5	270	S26	2	26L/min ⁽²⁾	7	5
Split system electric	System 6-SL	250	3.6kW	2	150L	5	3
	System 7-SL	315	3.6kW	2	200L	6	4

⁽¹⁾ This system satisfies the requirements for 6 star standard in Victoria when building a new home.
⁽²⁾ Select booster to match the number of hot water outlets that will operate at the same time.

Capitalise on great government incentives as Rinnai's solar systems have been developed to maximise performance resulting in a high number of Small Scale Trading Certificates (STC's) being awarded. Visit www.rinnai.com.au and use our incentive calculator.

<i>Warranty</i>	
Continuous Flow Gas Booster	12 Years (heat exchanger)
Storage Tank	5 Years
Solar Collectors	Flat plate 7 years Evacuated tubes 15 years

For further information on warranty conditions and exclusions download our booklet from www.rinnai.com.au

Rinnai Australia Pty Ltd

ABN 74 005 138 769

100 Atlantic Drive,
Keysborough, Victoria 3173

For further information visit

rinnai.com.au

or call 1300 555 545

Dealer Details:

Rinnai
Relax. It's a Rinnai.